
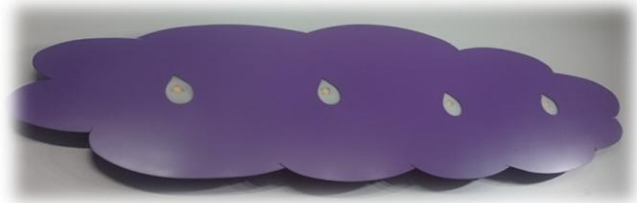


NUBE 170

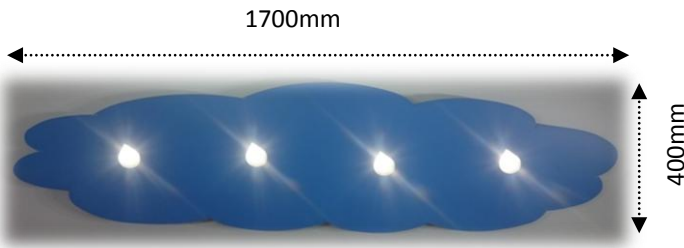

-  **60w**
-  **5700° 5000°**
4000° 3000°
-  **3600 lm**
-  **90 CRI**
-  **DIMMING OPCIONAL**
-  **IP 20**
-  **SUPERFICIE**
-  **PF >97**
-  **APERTURA 105°**
-  **DRIVER MEAN WELL**

- 9016 BLB**
- 1015 OCT**
- 1021 AMM**
- 2004 NJM**
- 3020 RJB**
- 3027 FR**
- 4003 RSM**
- 4005 LIM**
- 279C AZM**
- 5015 AZB**

- 381C PIM**
- 6018 VCB**
- 6002 VOB**
- 7024 GRB**
- 7035 TMT**
- 8019 WEM**
- 9005 NGB**

PROTECCIÓN

- ✓ Sobretensión
- ✓ Cortocircuito

NORMATIVA

ARMONICOS

- EN55015
- EN61000-3-2 CLASE C
- EN61000-3-3

INMUNIDAD EMC

- EN61000-4-2,3,4,5,6,8,11
- EN61547

